

(0 7. 07. 04)



INVESTOR IN PEOPLE



The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 07 JUL 2004	
WIPO	PCT

1804/2291

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

BEST AVAILABLE COPY

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

*W. Evans*

Dated 11 May 2004



Patents Form 1/77


Patents Act 1977  
(Rule 16).

The  
Patent  
Office

18JUL03 E823625-1 002879  
PO1/7700 0.00-0316862.2

1/77

**Request for grant of a patent**  
(See notes on the back of this form. You can  
also get an explanatory leaflet from the Patent  
Office to help you fill in this form)

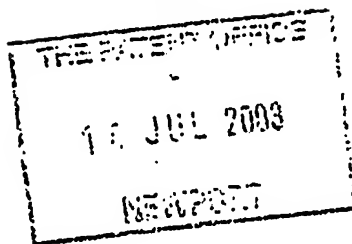

The Patent Office

Cardiff Road  
Newport  
Gwent NP10 8QQ

1. Your reference PHGB 030117GBP
2. Patent application number  
(The Patent Office will fill in this part) 0316862.2
3. Full name, address and postcode of the or of  
each applicant (underline all surnames) KONINKLIJKE PHILIPS ELECTRONICS N.V.  
GROENEWOUDSEWEG 1  
5621 BA EINDHOVEN  
THE NETHERLANDS  
07419294001  
 Patents ADP Number (*if you know it*) 07419294001  
 If the applicant is a corporate body, give the  
country/state of its incorporation THE NETHERLANDS
4. Title of the invention DISPLAY DEVICE
5. Name of your agent (*if you have one*)  
 "Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode) Philips Intellectual Property & Standards  
Cross Oak Lane  
Redhill  
Surrey RH1 5HA  
 Patents ADP number (*if you know it*) 08359655001 ✓
6. If you are declaring priority from one or more  
earlier patent applications, give the country  
and the date of filing of the or of each of these  
earlier applications and (*if you know it*) the or  
each application number
 

	Country	Priority Application number	Date of filing
7. If this application is divided or otherwise  
derived from an earlier UK application, give  
the number and the filing date of the earlier  
application
 

	Number of earlier application	Date of filing (day/month/year)
8. Is a statement of inventorship and of right to  
grant of a patent required in support of this  
request? (Answer "Yes" if:
 

a) any applicant named in part 3 is not an inventor, or	YES
b) there is an inventor who is not named as an applicant, or	
c) any named applicant is a corporate body.	

 See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

### Continuation sheets of this form

Description	10
Claims(s)	2
Abstract	1
Drawings	6


10. If you are also filing any of the following, state how many against each item:

### Priority Documents

- Translations of priority documents
- Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)
- Request for preliminary examination and search (*Patents Form 9/77*)
- Request for substantive examination (*Patents Form 10/77*)
- Any other documents  
(Please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

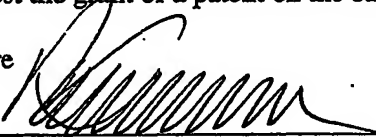

Date

17/7/03

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5280

P L WILLIAMSON

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered "Yes" Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.

## Display device

The invention relates to an display device comprising a display with a plurality of display pixels. More specifically the invention relates to an active matrix display device, preferably comprising polymer light emitting diodes (PLEDs) or small molecule light emitting diodes (SMOLEDs)

Display devices of the hold type are known to suffer from what is known as sample/hold effects. These effects arise from the fact that in every frame period a new image may be displayed at the start of the frame period (sample), whilst in the remainder of the frame period (typically 16 ms for 60 Hz operation) the image remains visible on the display (hold). This effect is experienced by a viewer as a blurred image if moving images are displayed.

The image blurring effect can be reduced by operating the display in a pulsed mode, wherein the frame period is time-divided in two sub-frames, wherein only one the sub-frames is displayed. This pulsed mode operation, however, is disadvantageous in that high brightness levels are difficult to achieve.

US2002/0003520 discloses a display device being a hold type display device which holds a brightness of the antecedent picture until the subsequent signal is inputted to a pixel, wherein a frame displaying one picture is time divided into multiple sub-frames and the brightness of the subsequent sub-frame is attenuated at a designated ratio according to the brightness of the inputted picture. The thus obtained display device prevents a moving picture from being unclear and blurred and controls the lowering of the brightness in of the picture.

The prior art display device is disadvantageous in terms of power dissipation as the originally generated light signal from the liquid crystal display (LCD) backlight is attenuated afterwards. Power dissipation considerations are

particularly relevant for mobile applications, such a cellular phones, laptops and personal digital assistants (PDA's).

5           It is an object of the invention to provide a display device that yields a higher energy efficiency whilst maintaining or improving the performance of the display device in terms of the sample/hold effect and light intensity.

10           This object is achieved by an active matrix display device comprising a display with a plurality of display pixels, each having:

- a current driven emissive element;
- a data input for receiving an analogue data signal;
- 15       - at least one drive element connected to a power supply and arranged to drive said current emissive element in accordance with said data signal;
- selecting means arranged to provide, in response to a select signal, said data signal to said at
- 20       least one drive element to generate an overall brightness level during a frame period in accordance with said data signal,

wherein said device is adapted to divide said frame period in at least a first sub-period during which said emissive element carries a first non-zero current and a second sub-period during which said emissive element carries a second non-zero current, said at least first and second non-zero current substantially yielding said overall brightness level. The emissive elements in such a device are current driven such

30       that the light output for a particular element can be tuned to the required brightness output for a particular sub-period, thereby avoiding attenuation, and thus energy waste, of a previously generated signal. The active matrix display device may, in contrast to a liquid crystal display, switch between

35       said sub-periods instantaneously.

In an embodiment of the invention the active matrix display device comprises a display controller for generating said select signal, said select signal comprising at least a first select signal triggering said first sub-period and a  
5 second select signal triggering said second sub-period. In  
~~this embodiment the display pixel is addressed more than once~~  
for each frame period by supplying various addressing pulses to the selecting means. In this way the distribution of current between the sub-periods can be chosen freely as long  
10 as the total of the currents carried by the emissive elements for the various sub-periods yields the overall brightness. In a preferred embodiment, the first current exceeds the second current and/or the first sub-period and said second sub-period  
15 are of different duration, such as a first sub-period of shorter duration than said second sub-period. Sample/hold effects are reduced further if the emissive element carries the first current for less than 50% of the frame period.

In an embodiment of the invention the active matrix display device comprises a display controller adapted to  
20 generate at least said first current and said second current by varying a voltage for said drive element. Preferably the voltage is varied via a power supply line or voltage supply line. In contrast to the previously discussed embodiment, this  
25 embodiment does not require substantial processing of the data signal. The display pixels can be dimmed in the second sub-period whilst only addressing these pixels once. Preferably the drive element is a thin film transistor (TFT) having a short channel length. Such a TFT exhibits a larger variation of the source-drain current with the source-drain voltage and  
30 has smaller dimensions enabling an increased pixel aperture.

In an embodiment of the invention the display pixels are arranged in a matrix of rows and columns, said device comprising lines for manipulating a voltage for said drive  
element for each row or group of rows, the latter option  
35 requiring less power lines, and said device comprises a display controller adapted to scan said lines along said rows

or group of rows across the display in the direction of addressing. In this way the current emissive elements carry the second non-zero current, i.e. the dimmed state, for the same period of time. When groups of rows are scanned signal processing may be applied in order to increase the second non-zero current in the second sub-period slightly for the last rows of a group as to reduce any artefacts.

In an embodiment of the invention the active matrix display device is adapted to yield a brightness at said second non-zero current of 30% or less of the brightness at said first non-zero current. Perception studies have revealed that viewers experience an acceptable reduction of motion blur artefacts even if the second non-zero current yields a brightness of 30% of the brightness obtained by driving the first non-zero current through the current emissive element.

It should be appreciated that the embodiments, or aspects thereof, may be combined.

The invention further relates to an electric device comprising a display device as described in the previous paragraphs. Such an electric device may relate to handheld devices such as a mobile phone, a Personal Digital Assistant (PDA) or a portable computer as well as to devices such as a Personal Computer, a television set or a display on e.g. a dashboard of a car. It is noted that the issue of power consumption is particularly relevant for battery powered devices.

The invention will be further illustrated with reference to the attached drawings, which show preferred embodiments according to the invention. It will be understood that the device and method according to the invention are not in any way restricted to this specific and preferred embodiment.

Fig. 1 shows an electric device comprising an active matrix display device according to an embodiment of the invention;

Fig. 2 shows a schematical illustration of the active matrix display device of the electric device shown in Fig. 1;

Fig. 3 shows a voltage addressed display pixel according to an embodiment of the invention;

Fig. 4 shows a current addressed current mirror display pixel according to an embodiment of the invention;

Fig. 5 shows a light emission profile according to an embodiment of the invention;

Fig. 6 shows an output characteristic of a typical PMOS thin film transistor as a function of the drain-source voltage for different data signals ( $V_{gs}$ )

Fig. 1 shows an electric device 1 comprising an active matrix display 2 having a plurality of display pixels 3 arranged in a matrix of rows 4 and columns 5. The display 2 may be a large display. Motion artefacts generally are most visible on such large displays.

Fig. 2 shows a schematical illustration of an active matrix display device 6, comprising the display 2 of the electric device 1 as shown in Fig. 1. The display 2 comprises a display controller 7, including amongst others a row selection circuit 8 and a data register 9. A data signal, comprising information or data such as (video) images to be presented on the display, is received via data input 10 by the display controller 7. The data are written to the appropriate display pixels 3 from the data register 8 via data lines 11. The selection of the rows 4 of the display pixels 3 is performed by the row selection circuit 8 via selection lines 12, controlled by the display controller 7. Synchronization between selection of the display pixels 3 and writing of the data to the display pixels 3 is performed by the display controller 10. Moreover the display controller 7 controls the



power supply of the display pixels 3 via power lines 13.

Figs. 3 and 4 show two examples of circuit arrangements for the display pixels 3 for the active matrix display device 6.

5 Fig. 3 shows a voltage addressed circuit arrangement for a display pixel 3 comprising a selecting means, such as an addressing transistor T1, a storage capacitor C and a drive element T2 for applying a driving signal to a current driven emissive element 14. The transistor T1 is arranged to receive  
10 a select signal over the line 12 from the display controller 7. T1 passes the data signal for a particular frame to the gate of T2 if an appropriate select signal is received. T2 may be a p-Si thin film transistor (TFT) and the current driven emissive element 14 may be a light emitting diode, such as an  
15 polymer light emitting diode (PLED) or small molecule organic light emitting diode (SMOLED). One of the plates of the capacitor C and the source electrode of T2 are connected to the power supply line 13.

If T2 is biased in saturation it behaves as a  
20 constant current source, passing a current which is proportional to  $\mu_{fe} \cdot (V_{GS} - V_T)^2$  where  $V_{GS}$  is the gate-source voltage of T2,  $V_T$  the threshold voltage, and  $\mu_{fe}$  is the field effect mobility of T2. This constant current is then driven through the emissive element 14 which is connected to T2.  
25 Thus, the current source is programmed by setting the voltage on the gate of T2. This is conventionally achieved during a short addressing time of e.g. 25 $\mu$ s by turning on T1 via line 12 and transferring the signal voltage from the data register 9 to the gate of T2. T1 is then switched off, and the programmed  
30 voltage is held on the gate of T2 for the rest of the frame time. The storage capacitor C prevents appreciable discharge of this node via leakage through T1, thus forming a memory to allow continuous LED current while the other rows 4 of the display 2 are selected sequentially. It is noted that voltage  
35 addressed display pixels 3 are known in many variants that may employ further transistors. Such variants fall under the scope

of the present invention.

Another category of display pixel circuits are the current addressed display pixel circuits 3 shown in Fig. 4. The driving transistor T2 is used in both addressing the display pixel 3 and in driving the emissive element 14. The data input signal is applied as a current rather than a voltage over the line 11, indicated by the current source I. During the addressing period the driving transistor T2 is diode-connected by the transistor T4 via addressing transistor T1, and the emissive element 14 is isolated from the circuit by the transistor T3. During this addressing period the data input current is forced through T2 while the capacitor C is charged to reach the associated gate-source voltage  $V_{GS}$  for T2. Now, by opening T1 and T4 and by closing T3, the drain current is fed to the emissive element 14. The memory function of the capacitor C assures the current to be a perfect copy of the data input current received over line 11.

Fig. 5 shows an illustration of a light emission profile according to an embodiment of the invention. The light emission profile is obtained by the active matrix display device 6 that is adapted to divide the frame period F in at least a first sub-period F1 during which the emissive element 14 carries a first non-zero current I1 and a second sub-period F2 during which the emissive element 14 carries a second non-zero current I2. As the currents I1 and I2 are proportional to the light output or brightness levels BL for the sub-periods F1 and F2, the respective light outputs yield the overall brightness level of the display pixel 3 for the frame period F.

The invention enables the device 6 to achieve the same overall brightness level (=integral area under the curve 16) by maintaining a finite current I2 through the emissive element 14 without requiring the high peak brightness represented by the dashed line 17. This reduces power dissipation and may result in an extended lifetime of the display 2 as the peak currents are lower. The emissive

elements 14 are current driven such that the light output for a particular element 14 can be exactly tuned to the required brightness level for the particular sub-periods F1 and F2. The active matrix display device 6 may, in contrast to a liquid crystal display, switch between current I1 and I2 instantaneously. Perception studies have revealed that motion blur artefacts are perceived as being reduced even if I2 is 30% or less than I1.

It is noted that the profile 16 in Fig. 5 only illustrates a simple example. More complex profiles may be generated from the display controller 7, including varying peak currents I1 in subsequent frame periods F, the current I2 being kept at a fixed or variable ratio or a stable level for the sub-period F2, and multiple sub-periods F1, F2, ... Fn having corresponding non-zero currents I1, I2, ... In. The sub-periods F1 and F2 may be of different duration.

Next several embodiments to obtain the profile 16 of Fig. 5 will be described.

In an embodiment the display controller 7 of the active matrix display device 7 generates a select signal 18, as displayed in Figs. 3 and 4. The select signal 18 comprises a first select signal 18' triggering the first sub-period F1 and a second select signal 18" triggering the second sub-period F2 of Fig. 5. The display pixel 3 is thus voltage- or current addressed more than once for each frame period F by supplying various addressing pulses to the selecting means T1 and T1, T3, T4 respectively. The display controller 7 processes the data signal received over input 10 and distributes the data signal for the frame period F as a current I1 fed to the emissive element 14 for the sub-period F1 and a current I2 fed to the emissive element 14 for the sub-period F2. Multiple sub-periods F1...Fn can be obtained by applying multiple address pulses to the selection means.

In another embodiment the display controller 7 is adapted to generate at least said first current I1 and said second current I2 by varying a voltage for the drive

transistor T2. This embodiment is more time-efficient as no signal processing of the data signal is required. The modification of the source-drain voltage can be performed by controlling a power supply line 13 (see Fig. 3), such that in  
5 sub-period F1 the current carried by emissive element 14 is I1, whereas the current carried during sub-period F2 is I2. Alternatively the source-drain voltage of the drive transistor T2 can be manipulated via a voltage line 15 (see Fig. 3), wherein e.g. the cathode voltage of the current emissive  
10 element 14 can be addressed pixel by pixel or row at the time.

Fig. 6 shows an output characteristic of a typical PMOS thin film drive transistor T2 as a function of the drain-source voltage  $V_{DS}$  for different data signals ( $V_{GS} = V1$ ;  $V_{GS} = V2$ , where  $V2 > V1$ ). Apparently for all brightness levels BL of the  
15 display pixels 3 (defined by the gate-source voltages) the current through the drive transistor T2 reduces as the drain-source voltage  $V_{DS}$  decreases. Therefore, all display pixels 3 can be dimmed by manipulating the voltage over the emissive element 14, as required during sub-period F2, while only  
20 addressing the display pixel 3 once. The voltage from the power supply line 14 is again increased to obtain I1 just before the next addressing period. Such variations of the voltage can be obtained instantaneously allowing fast and accurate control over the current carried by the emissive  
25 element 14.

In Fig. 6, the solid curves represent characteristics of the drive transistor T2 having short channel lengths (e.g. 4 microns), while the dashed curves represents a long channel length driving transistor T2 (e.g. 50 microns). Clearly the  
30 variation of the current  $I_{DS}$  of T2 is more pronounced for short channel lengths, as a consequence of which short channel lengths driving transistors may be preferred to achieve the reduction of the current I2 to 30% of I1. Moreover such small dimensions are advantageous for the aperture of the display  
35 pixel 3.

In order to achieve a uniform image on the display 2, it is preferred that the reduction of the voltage of the emissive element 14 can be scanned along the rows 4 (shown in Fig. 1) of the display 2 from top to bottom in the direction of addressing. In this way all display pixels 3 can be dimmed during a same period F2. Such an embodiment can be obtained by providing individual power lines 13 or voltage lines 15 for either each row of display pixels 3 or, more realistically, for a group of adjacent rows 4 to limit the number of power lines 13, 15. For such group of rows 4, the display controller 7 may process the signal to reduce any artefacts related to changing the voltage of the power lines 13 or voltage lines 15 of a group of rows 4 simultaneously. In some embodiments, this processing may involve a slight increase of the current I1 for the last rows 4 of each group as the display pixels 3 of these rows 4 carry this current for a slightly shorter time.

## CLAIMS

1. Active matrix display device (6) comprising a display (2) with a plurality of display pixels (3), each having:

- a current driven emissive element (14);
- 5       - a data input (10) for receiving an analogue data signal;
- at least one drive element (T2) connected to a power supply and arranged to drive said current emissive element (14) in accordance with said data
- 10       signal;
- selecting means (T1; T1,T3,T4) arranged to provide, in response to a select signal (18), said data signal to said at least one drive element (T2) to generate an overall brightness level
- 15       during a frame period (F) in accordance with said data signal,

wherein said device (6) is adapted to divide said frame period (F) in at least a first sub-period (F1) during which said emissive element (14) carries a first non-zero current (I1) and a second sub-period (F2) during which said emissive

20       element (14) carries a second non-zero current (I2), said at least first and second non-zero current substantially yielding said overall brightness level.

2. Active matrix display device (6) according to

25       claim 1, wherein said device (6) comprises a display controller (7) for generating said select signal (18), said select signal (18) comprising at least a first select signal (18') triggering said first sub-period (F1) and a second select signal (18'') triggering said second sub-period (F2).

30       3. Active matrix display device (6) according to claim 1, wherein said first sub-period (F1) and said second sub-period (F2) are of different duration.

4. Active matrix display device (6) according to claim 3, wherein said first sub-period (F1) has a shorter duration than said second sub-period (F2).

5 claim 1, wherein said first non-zero current exceeds said second non-zero current.

6. Active matrix display device (6) according to claim 1, wherein said device (6) comprises a display controller (7) adapted to generate at least said first current (I1) and said second current (I2) by varying a voltage for said drive element (T2).

7. Active matrix display device (6) according to claim 1, wherein said drive element (T2) is a thin film transistor having a short channel length.

15 8. Active matrix display device (6) according to claim 1, wherein said display pixels (3) are arranged in a matrix of rows (4) and columns (5), said device (6) comprising lines (13;15) for manipulating a voltage for said drive element (T2) for each row (4) or group of rows (4), and said  
20 device (6) comprises a display controller (7) adapted to scan said lines (13;15) along said rows (4) or group of rows (4) across the display (2).

9. Active matrix display device (6) according to claim 1, wherein said device (6) is adapted to yield a  
25 brightness at said second non-zero current (I2) of 30% or less of the brightness at said first non-zero current (I1).

10. Electronic device (1) comprising an active matrix display device (1) according to any one of the preceding claims.

**ABSTRACT**

The invention relates to an active matrix display device comprising a display with a plurality of display pixels, each having a current driven emissive element, a data input for receiving an analogue data signal, at least one  
5 drive element connected to a power supply and arranged to drive the current emissive element in accordance with the data signal and selecting means arranged to provide, in response to a select signal, the data signal to the at least one drive  
10 element to generate an overall brightness level during a frame period in accordance with the data signal. The device is adapted to divide the frame period in at least a first sub-period during which the emissive element carries a first non-zero current and a second sub-period during which the emissive  
15 element carries a second non-zero current, the at least first and second non-zero current yielding the overall brightness level.



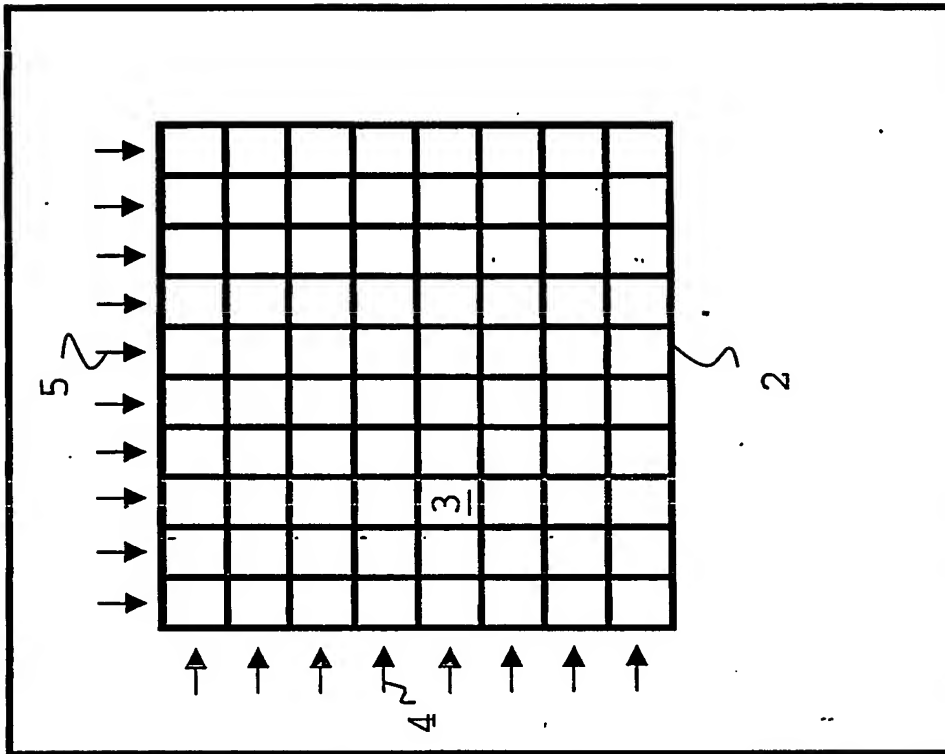


Fig. 1

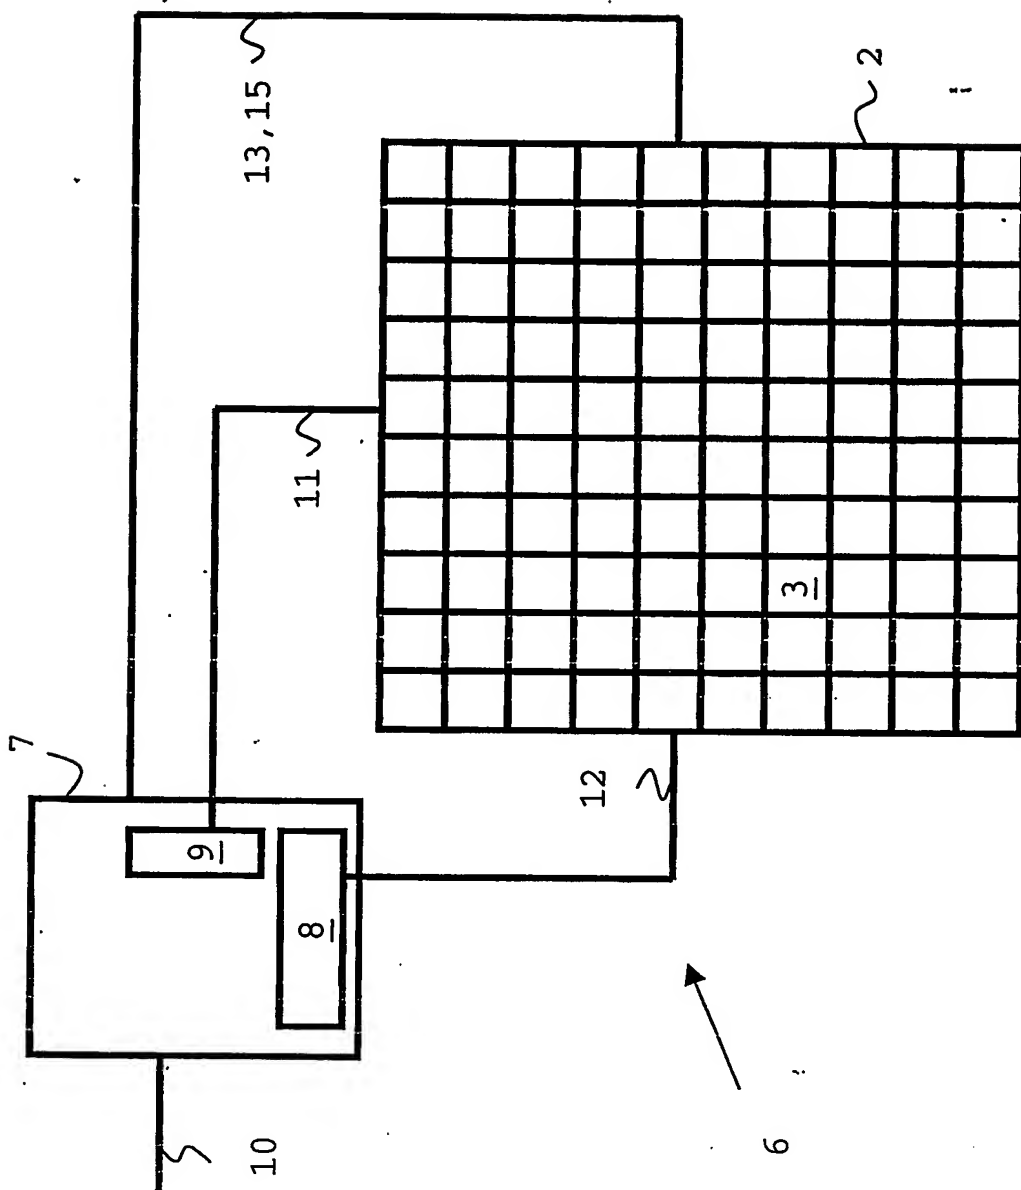


Fig. 2

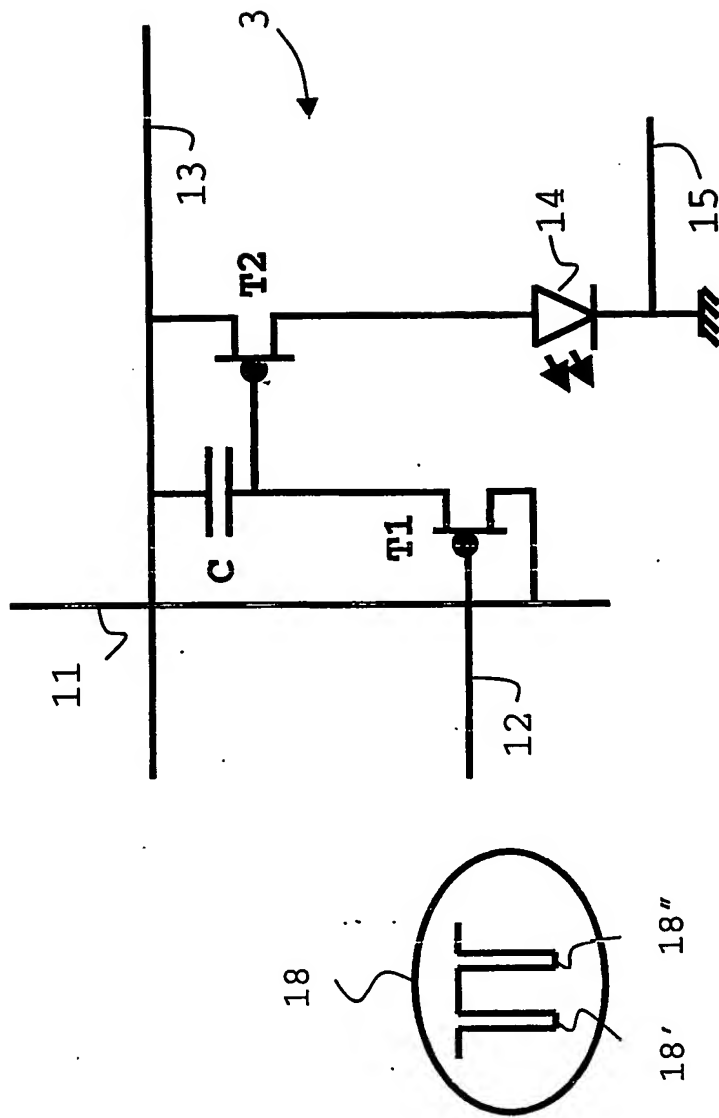


Fig. 3

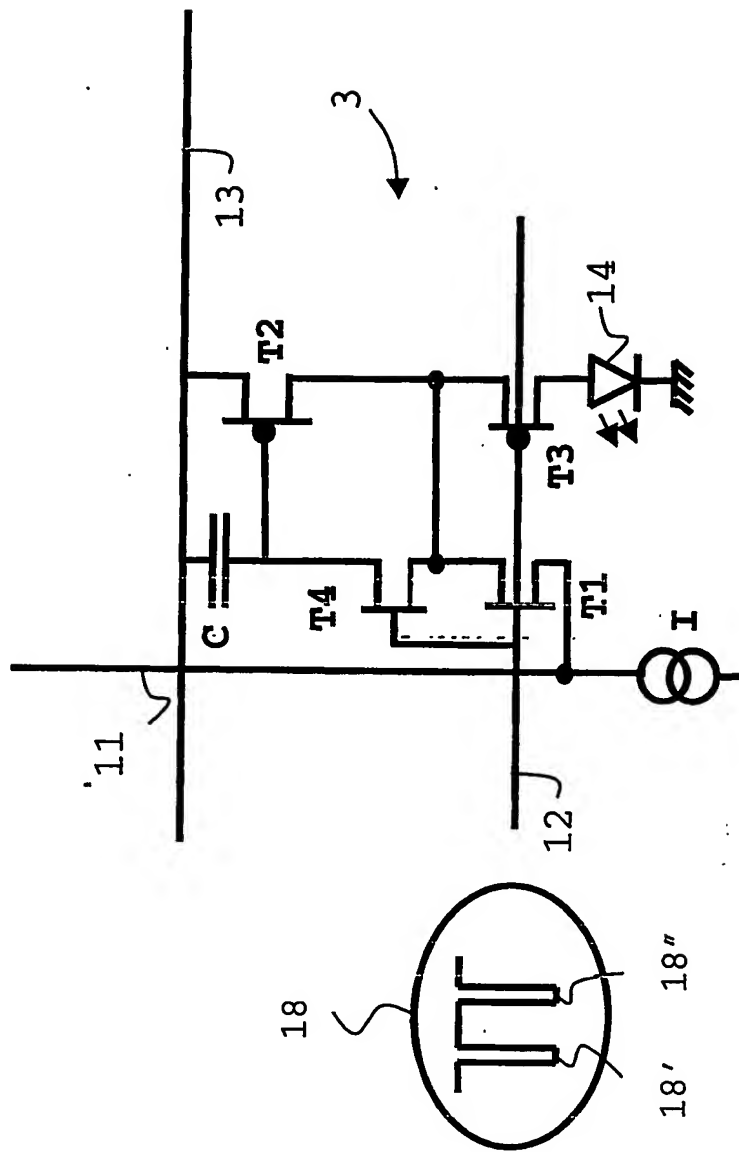


Fig. 4

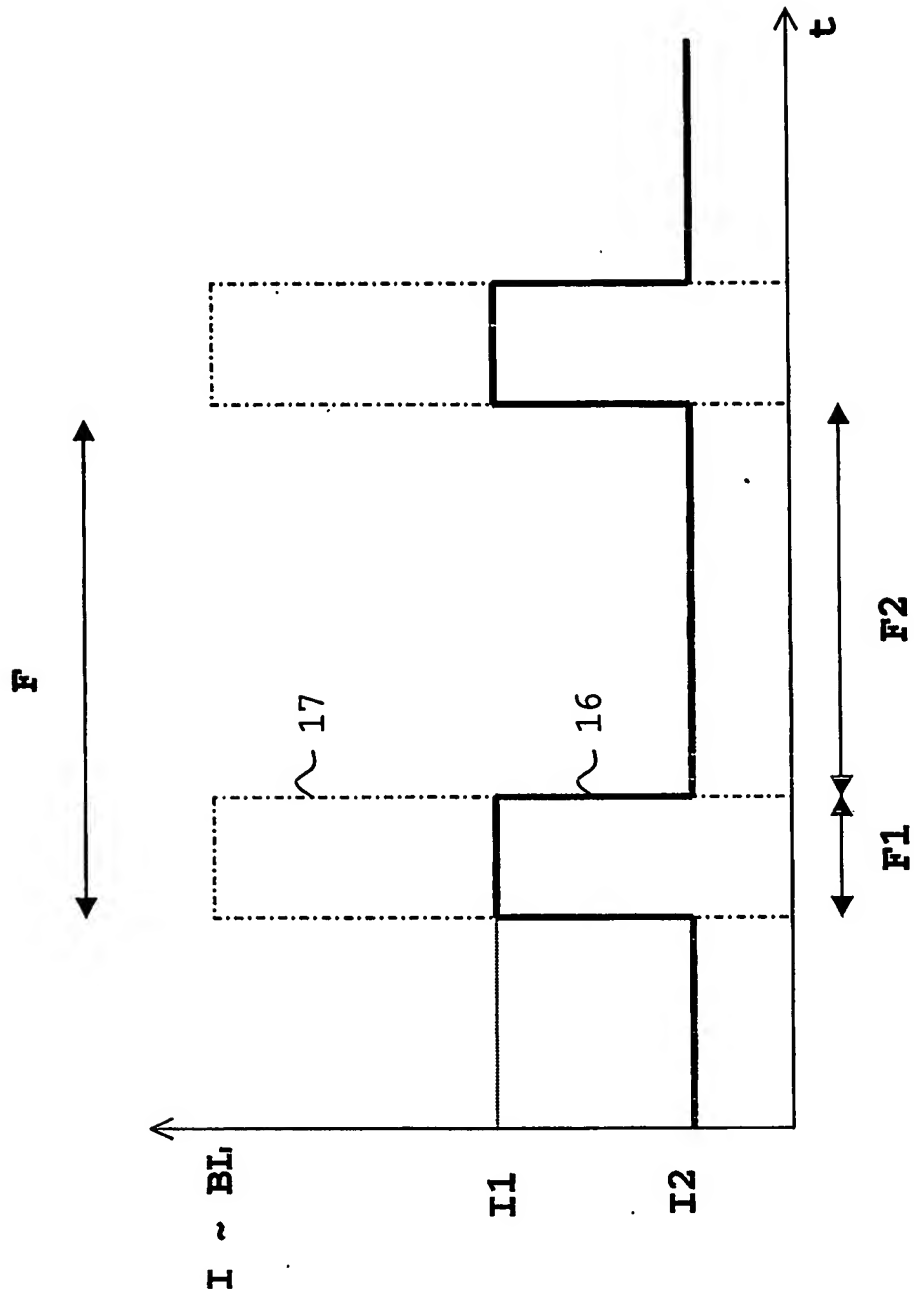


Fig. 5

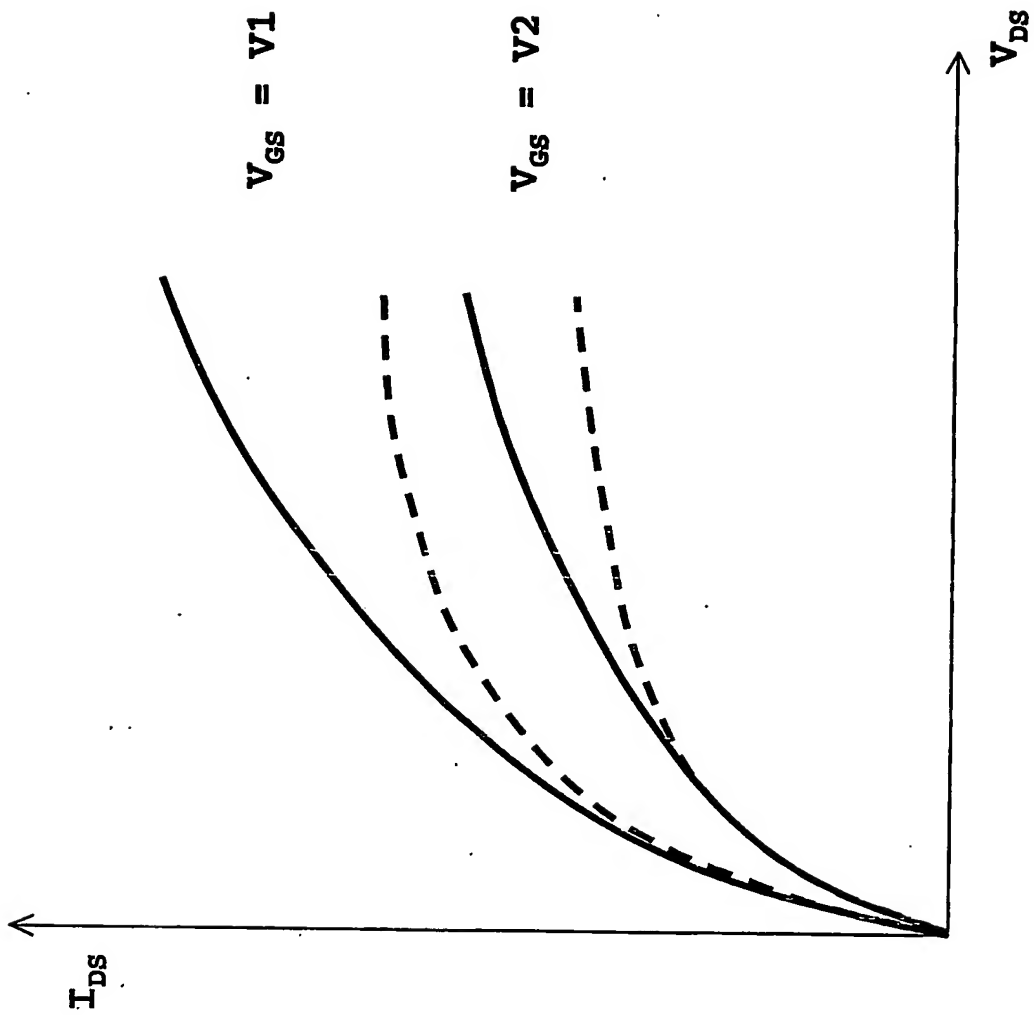


Fig. 6

PCT/IB2004/002291



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**